

THE WORLD LEADER IN FUME EXTRACTION TECHNOLOGY



BOFA's PrintPRO 1000 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new PrintPRO 1000 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

STANDARD FEATURES:

- iQ Operating System
- High airflow and pressure rates
- Reverse Flow Air technology
- DeepPleat DUO pre filter
- Combined HEPA/Gas filter incorporating ACF technology
- Filters with long life and low replacement cost
- Automatic Flow Control system
- Real time airflow reading
- Independent filter condition monitoring, display and warnings
- High contrast display
- 'Run safe' operation

OPTIONAL FEATURES:

- Smart Filter technology
- VOC gas sensor (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- Interfacing
- On-board compressor
- Optional filter media's
- DEEP PLEAT DUO
 - Advanced Carbon Filter technology
 - Reverse Flow Air technology
 - **Optional Smart Filter technology**








http://www.bofa.co.uk/igOperationSystem.asp



explains exactly why the BOFA iQ

ACF

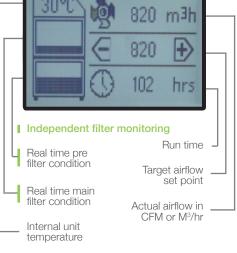

The high end fume

extraction system for

the printing industry.

wide format printers and

- iQ Intelligent technology
 - DeepPleat DUO filter technology

UNITS - PART NUMBERS		OPTIONS				
Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring	On-board Compressor
PrintPRO 1000 iQ Stainless Steel	230V	L4372	A2001	A2002	A2003	A2007
	115V	L4371				
PrintPRO 1000 iQ Powder Coated	230V	L4362				
	115V	L4361				

REPLACEMENT FILTERS - PART NUMBERS				
Model DeepPleat DUO Pre Filter		Combined HEPA/Gas Filter		
PrintPRO 1000 iQ	A1030222	A1030304		

TECHNICAL DATA		
	230V	115V
Dimensions (HxWxD)	1197 x 600 x 790mm	47.1 x 23.6 x 31.1"
Cabinet Construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / Pressure	850m³/hr / 100mbar	500cfm / 100mbar
Electrical Data	230v 1ph 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw
Noise Level	< 61dBA*	< 61dBA*
Weight	140kgs	309lbs
Approvals	CE	CE

* At typical operating speed.

DEEPPLEAT DUO PRE FILTER SPECIFICATIONS		
Surface Media Area	30m² approx	
Filter Media	Glass Fibre	
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec mild steel	
Filter Efficiency	F8 (95% @ 0.9 microns)	

COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	7.5m ² approx	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Treated Activated Carbon	34kgs	
Filter Efficiency	99.997% @ 0.3 microns	




BOFA INTERNATIONAL LTD

Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk

BOFA AMERICAS, INC

Tel: (618) 205 5007 Fax: (866) 707 2632 Email: sales@bofaamericas.com Web: www.bofaamericas.com

AIRFLOW THROUGH FILTERS

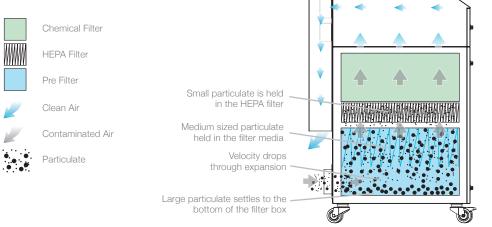

TECHNICAL SPECIFICATION

- iQ Display
 On / Off Switch
- 3 Power Cable
- 4 Signal / Interface Cable
- 5 Castors
- 6 Door Hinge
- 7 Hose Inlet Connection - 125mm
- 8 Exhaust Outlet
- 9 Motor Cooling Inlet
- 10 Door Latch 11 Motor Cooling Outlet
- 12 Standby Button



