

THE WORLD LEADER IN FUME EXTRACTION TECHNOLOGY



The PrintPRO Oracle DS is BOFA's mid to high end range of fume extraction and filtration system. The PrintPRO Oracle DS has been purposely designed to filter the fumes generated from Dye Sublimation printers. This extraction system combines extremely large filter capacity with high airflows and pressure. This combination makes it ideal for heavy duty applications that generate large amounts of particulate and gaseous organic compounds. This system benefits from Automatic Flow Control, which enables the end user to set the required airflow for the application. The unit will then maintain this airflow throughout the life cycle of the filters.

The additional feature of BOFA's 'Easi-Seal' filter location mechanism makes filter change easy, quick and safe. A truly state of the art laser fume purification solution.

STANDARD FEATURES:

- Hydrophobic HEPA Filters
- Turbines with high airflow and pressure
- Filters with long life and low replacement cost
- Automatic flow control system
- Automatic fluid drain
- Fluid collection tray

The complete, high performance global fume extraction solution for Dye Sublimation printers.



Automatic Flow Control

OPTIONAL FEATURES:

- VOC gas sensor (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- 2 x Sponge filter version



PART NUMBERS					
Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring
PrintPRO Oracle DS (2 x Foam + Hydrophobic HEPA) Powder Coated Stainless Steel	90 - 230V	L3342A	A2001	A2002	A2003
Optional PrintPRO Oracle DS (Foam + Hydrophobic HEPA + Gas) Powder Coated Stainless Steel	90 - 230V	L3442A			


REPLACEMENT FILTERS			
Model	Sponge Filter	Gas Filter	Hydrophobic HEPA Filter
PrintPRO Oracle DS (2 x Foam + Hydrophobic HEPA)	A1030219	N/A	A1030220
Optional PrintPRO Oracle DS (Foam + Hydrophobic HEPA + Gas)	A1030248	A1030247	A1030220

TECHNICAL DATA				
	230V	115V		
Dimensions (HxWxD)	980 x 430 x 430 mm	38.5 x 17 x 17"		
Cabinet Construction	Brushed stainless steel	Brushed stainless steel		
Airflow / Pressure	380m³/hr / 96mbar	223cfm / 96mbar		
Electrical Data	90 - 257v 1ph 50/60Hz Full load cu	urrent: 12.5 amps / 1.1kw		
Noise Level	< 60dBA*	< 60dBA*		
Weight 75kg		165lbs		

SPONGE COALECENT FILTER SPECIFICATIONS		
Foam Media	58 Grade open cell foam	
Dimensions (HxWxD)	375 x 385 x 150	

HEPA FILTER SPECIFICATIONS		
Surface Media Area	7.5m ² approx	
HEPA Filter Media	Hydrophobic Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Efficiency	99.997% @ 0.3 microns	
Filter Housing	Zintec Mild Steel	

GAS FILTER SPECIFICATIONS		
Treated Activated Carbon	14kgs	
Filter Housing	Zintec Mild Steel	

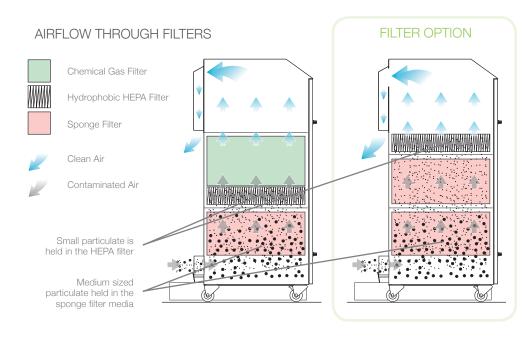


TECHNICAL SPECIFICATION

- 1 Unit / Filter Condition Display -Automatic Flow Control
- 2 On / Off Switch
- 3 Power Cable

- 4 Signal / Interface Cable
- 5 Door Hinge
- 6 Hose Inlet Connection 75mm / 50mm
- 7 Exhaust Outlet

- 8 Motor Cooling Inlet
- 9 Door Latch
- 10 Drain Valve

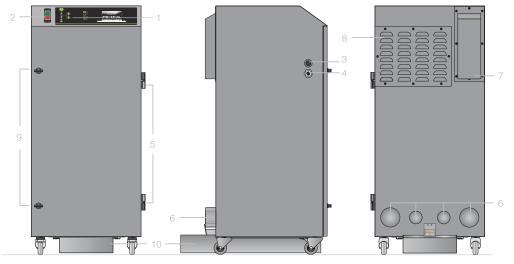

Date: 24/6/13 V:2

British Quality



BOFA INTERNATIONAL LTD

Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk



Tel: (618) 205 5007 Fax: (866) 707 2632 Email: sales@bofaamericas.com Web: www.bofaamericas.com





