I TECHNICAL SPECIFICATIONS



DOT 50x17 U SUPERFAST

DOT 50x25 U SUPERFAST

INTEGRABLE · DOT PEEN MARKING UNIT

Top-speed dot peen marking unit, up to 16 characters per second. Especially designed to be integrated into **production lines**.



ADVANTAGES

- Maximum marking speed, for all kinds of materials and hardnesses up to 62HRC.
- Its easy-to-disassemble protective system reduces maintenance times.
- Maximum reliability, uninterrupted productions, and reduced maintenance costs.
- Highly robust and long-lasting, thanks to the high quality of its components.

- Circular connector to facilitate assembly and disassembly. Possibility of 90-degree rotation.
- COUTH brand is backlit with two-colour LED, providing visual identification of the marking machine's status.
- Possibility of purchasing a protective cover from factory or as an accessory.

CHARACTERISTICS

- 50 by 17 mm marking area.
- 50 by 25 mm marking area.
- Speed up to 16 characters/second.
- Hardness of materials to mark up to 62HRC.
- 6-bar air pressure.
- Different head types, depending on marking needs: pneumatic (N7SB, N10SB, N14SB, N20SB) and electric (S2, S6).
- Protection system that is easy to assemble and disassemble .
- 2.5-metre robotics wire.
 - Other lengths: 5, 10 and 15 metres.


- Marking alphanumeric codes, logotypes, DATAMATRIX[™], QR codes, etc.
- Connection with COUTHsmartbox control for integration into production lines (see technical specifications for more information).
- PC edition programme:


COUTHvector, logotype creation.


COUTHedit, marking file creation.

COUTHmonitor, machine status monitoring.


• **COUTHlink.** Library to facilitate connectivity between COUTH smartbox and the production line PLC.







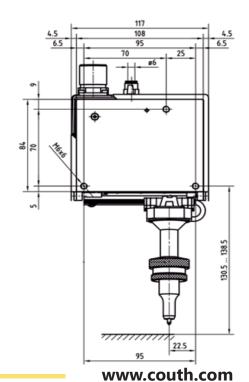





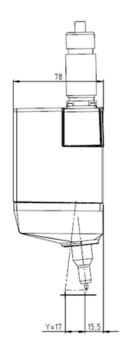





DOT 50x25 U SUPERFAST

INTEGRABLE · DOT PEEN MARKING UNIT L

DOT 50x17 U SUPERFAST

DIMENSIONS

0

76

79

DOT 50X17 U WITH PROTECTION



